



PennTex Voltage Regulators- Specialty

24 Volt

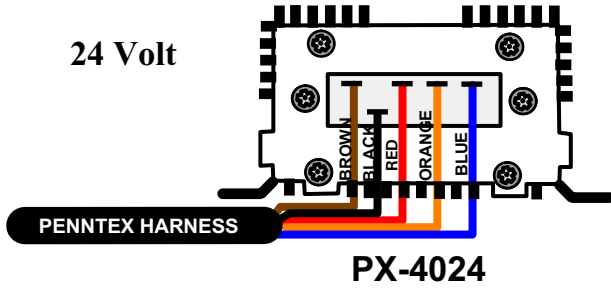


24 Volt Hybrid

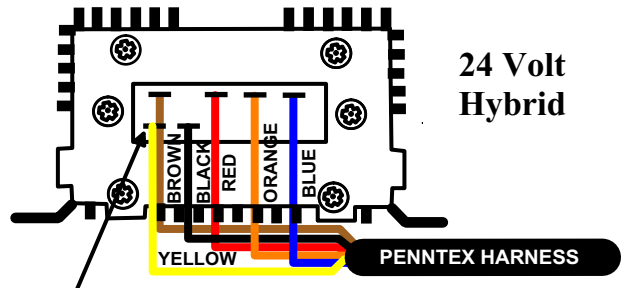


Note:
24 volt Hybrid regulator uses a 12 volt ignition (Brown) and 12 volt Battery (Red) source. There is an additional 24 volt sense (Yellow) source next to the ground (Black) terminal.

48 Volt

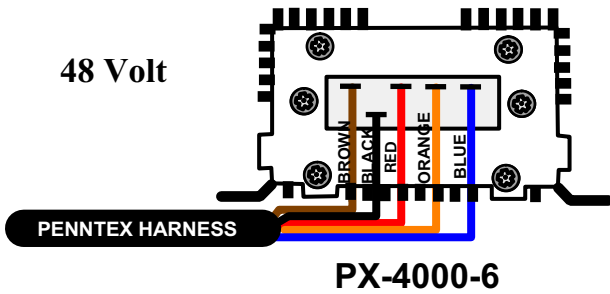

75 Volt

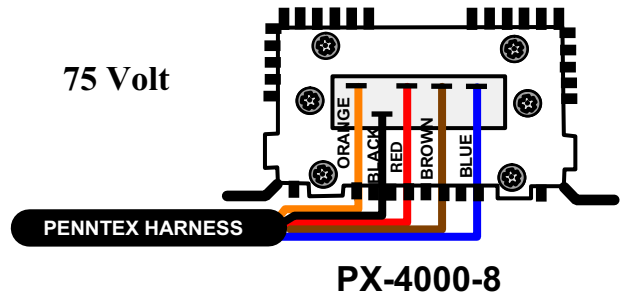

Note:
On PX-4000-8 (75 Volt) Brown and Orange Wire locations are different.

Top View



The regulator is a maximum of 72 inches away from the alternator because that's how long the harness is. Trace the harness from the plug at the brush holder with one orange and one blue wire and follow the main harness to the firewall. There will be a white plastic pass-through tube at the firewall. Locate the harness on the inside of the vehicle and trace the harness to the regulator.. If the regulator is mounted in the engine compartment, use the photo and drawings above to identify it. **Technical Support Toll Free: 1.877.590.7366**